shown in Textured Bronze with Metal Blades and Decorative Cage






The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.



shown in Textured Bronze with Barn Wood Blades shown in Textured Bronze with Mahogany Blades shown in Textured Bronze with Matte Black Blades shown in Textured Bronze with Metal Blades and Decorative Cage

ACOUA FINISH AND BLADE OPTIONS AQ-XX-XXXX SKU# (Model+Finish+Blade) **Standard Finishes Textured Bronze** ΤВ Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black WDBW WD **Blade Styles** WDBK and Material Metal w/ Decorative Cage Metal w/ Safety Cage MTL MSAF **TECHNICAL SPECS** Fan Weight 27 lbs 110 or 220 Voltage AC Motor Type YES Rotation inches: 5, 10, 20, 30, 48, 72 Downrods Lengths Field cuttable centimeters: 13, 25, 51, 76, 122, 183 **Downrod Diameter** 1 inch 16 inches / 41 cm + downrod length **Overall Drop** Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible Environment Ambience Soothing White Noise Safety Certification UL/CUL Warranty Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA Fan Head Options Solid Wood Metal with Guard Fan Diameter 39 inches / 99 cm 37 inches / 94 cm Fan Blade Diameter 13 inches / 33 cm 16 inches / 41 cm Safety Cage or Decorative Cage **Guard Options** No Cage Option RPM (Low / High) 721 / 1199 1040 / 1445 CFM (Low / High) 2750 / 4058 1825 / 3167 Watts (High) 101.25 80.50 CFM/Watt (High) 40.80 39.34 19° **Blade Pitch** 31° LIGHT KIT PHOTOMETRICS Lamping (Replaceable) GU10 LED Remote Dimmable No 2969 Delivered Temperature in K **Delivered Lumens** 337.30 94 CRI Watts 5 Hours 36,000 Light kit longevity if used 6 Hours/Day: 16.5 Years STANDARD EQUIPMENT One downrod of 10 inches / 25 cm Slant ceiling canopy for up to 29° Black 6-speed RF remote ACCESSORIES control with reverse Decora-style, 3-speed, non-dimmable wall control .

60° cathedral ceiling canopy

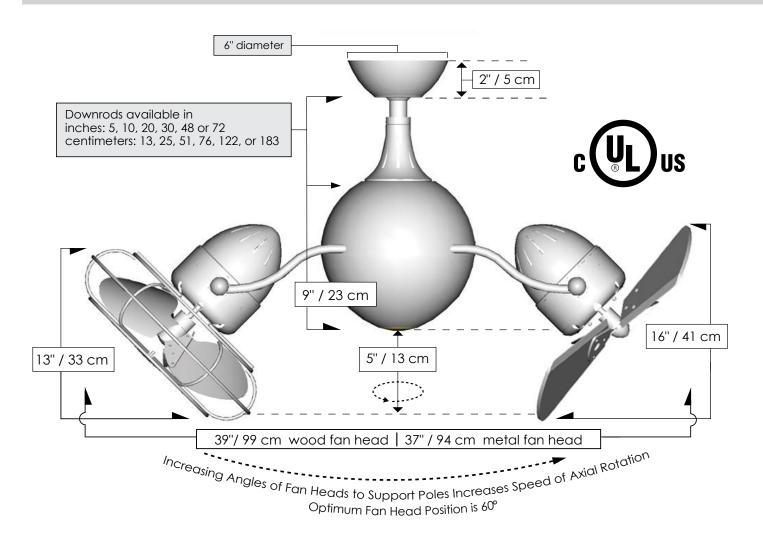

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded
10 ft or less	5 inches / 13 cm Use safety cages if applicable
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company 1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com © 2023 Matthews Fan Company. All rights reserved.

